


“C” tipo ilginis

Max. ilgis iki 13500 mm

Medžiaga: karšto cinkavimo lakštinis plienas

Plieno kokybė: S350GD+Z275

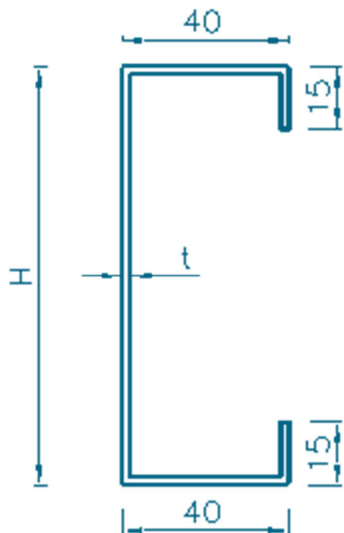

Profilis	H (mm)	t (mm)	A (cm ²)	I _x (cm ⁴)	W _x (cm ³)	I _y (cm ⁴)	W _y (cm ³)	M (kg/m)
C40x1,2	40	***	***	***	***	***	***	1,41
C40x1,5	40	***	***	***	***	***	***	1,77
C40x2,0	40	***	***	***	***	***	***	2,36
C50x1,2	50	***	***	***	***	***	***	1,51
C50x1,5	50	***	***	***	***	***	***	1,88
C50x2,0	50	***	***	***	***	***	***	2,51
C60x1,2	60	***	***	***	***	***	***	1,60
C60x1,5	60	***	***	***	***	***	***	2,00
C60x2,0	60	***	***	***	***	***	***	2,67
C70x1,2	70	1,2	2,06	15,10	4,32	4,62	1,88	1,61
C70x1,5	70	1,5	2,54	18,64	5,33	5,65	2,30	2,00
C70x2,0	70	2,0	3,32	24,00	6,86	7,18	2,92	2,61
C100x1,0	100	1,0	2,03	28,96	5,79	4,42	1,66	1,60
C100x1,2	100	1,2	2,42	34,56	6,91	5,24	1,96	1,90
C100x1,5	100	1,5	2,99	42,82	8,57	6,43	2,40	2,35
C100x2,0	100	2,0	3,92	55,47	11,10	8,18	3,05	3,09
C125x1,0	125	1,0	2,28	48,83	7,81	4,76	1,69	1,79
C125x1,2	125	1,2	2,72	58,35	9,34	5,64	2,00	2,14
C125x1,5	125	1,5	3,37	72,45	11,59	6,91	2,46	2,65
C125x2,0	125	2,0	4,42	94,17	15,07	8,80	3,12	3,49
C150x1,0	150	1,0	2,53	75,20	10,03	5,02	1,72	1,99
C150x1,2	150	1,2	3,02	89,95	11,99	5,95	2,04	2,38
C150x1,5	150	1,5	3,74	111,85	14,91	7,30	2,50	2,95
C150x2,0	150	2,0	4,92	145,74	19,43	9,30	3,18	3,88
C200x1,5	200	1,5	4,49	225,2	22,5	7,94	2,57	3,54
C200x2,0	200	2,0	5,92	293,34	29,33	10,04	3,25	4,68

I_x, y – inercijos momentas

W_x, y – atsparumo momentas